


## ACCUNIQ BP500 Specifications

Model	ACCUNIQ BP500
Measuring Method	Oscillometric
Display	Custom Mono LCD Disply
Measuring Range	Pressure 0 ~ 300mmHg, Pulse 30 ~ 240bpm
Accuracy	Pressure $\pm 2$ mmHg, Pulse within $\pm 1.5\%$
Cuff Type	Double cuff type
Minimum Scale unit	1mmHg
Pressurization	Complete automatic pressurization
Exhaust	Electronic exhaust system by micro control
Power Supply	Input: AC 100~240V, 50/60Hz / Output: DC 12V, 5A adapter
Operating Range	Temp. 10~40°C, Humidity 30 ~ 75% (non condensing)
Storage Range	Temp. -10~60°C, Humidity 95% (non condensing)
Dimension	450(W) × 502.4 (D) × 278.7(H)mm ( $\pm 10$ mm)
Weight	About 4.8 kg
Print	Thermal printer
Result	Systolic / Diastolic / Mean blood pressure, Pulse, Pulse pressure, Pulse wave pattern Rear Monitor(Optional) : Systolic / Diastolic blood pressure, Pulse, ID NO, Height, Weight, BMI

- ※ For purpose of improvement, specifications and design are subject to change without notice.
- ※ This is a medical device. Read precaution and operation method before use.
- ※ It is highly recommended for the product to be calibrated every 2 year if it is used a lot or 3 years are passed even though it is not used a lot after the purchase.

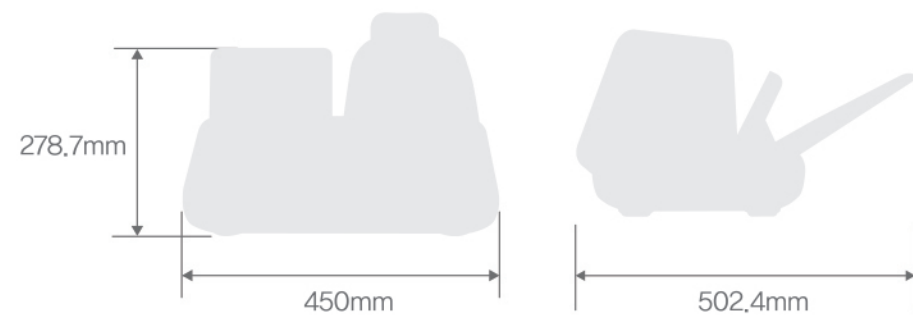

**SELVAS**  
Healthcare

HQ 155, Shinseong-ro, Yuseong-gu, Daejeon, Korea  
TEL +82-42-879-3000 | FAX +82-42-864-4462

SEOUL OFFICE(Sales) 20F, 19, Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea  
TEL +82-2-587-4056 | FAX +82-2-588-1937

Copyright © SELVAS Healthcare, Inc. All Rights Reserved | 2019.10.02. REV A.0

# ACCUNIQ BP500

www.accunIQ.com



**SELVAS**  
Healthcare

# BP500

Automatic Blood Pressure Monitor

BP 500 is light and solid design demonstrating high accuracy with two step measurement of customized pressurization

- Light and solid with a weight of less than 5kg
- Simple and sleek design
- Leading a good posture and stability during the measurement
- Detecting movement of the arm during the measurement to remove any measurement error
- Can be measured even the arm is thin or the pulse is weak
- Judging the blood pressure condition of the patient first at the phase of the pressurization, and doing second measurement at the phase of the exhaust
- Excellent visibility with the clear LCD
- Compatible with all the AccunIQ BCA devices
- Latex-free for those whom are allergic

## + Various optional parts for user



Thermal Printer



Rear Monitor



Adjustable Chair



Exclusive Cart



ACCUNIQ Body Composition Analyzer connection



- 01 LCD display
- 02 Emergency stop
- 03 Start / Stop
- 04 High-speed printer
- 05 Cuff
- 06 Arm support



## + Various printouts

2019.01.10	13:17
SYSTOILC	120 mmHg
DIASTOILC	71 mmHg
PULSE	86 bpm
ACCUNIQ	

• Simple mode A

2019.01.10	13:17
SYSTOILC	120 mmHg
DIASTOILC	71 mmHg
PULSE	86 bpm
PRP	10320
ACCUNIQ	

• Simple mode B

2019.01.10	13:17
SYSTOILC	120 mmHg
DIASTOILC	71 mmHg
MEANPRESS	87 mmHg
PULSE	86 bpm
PULSEPRESS	49 mmHg
PRP	10320
ACCUNIQ	

• Normal mode

