

DUAL COUNTER CHILLER / FREEZER


Magnetic Solid Door • Tested at ambient temperature of 38°C



BS 2DCF4/Z • BS 2DCF5/Z • BS 2DCF6/Z



BS 3D2C1F7/Z • BS 3D2C1F8/Z

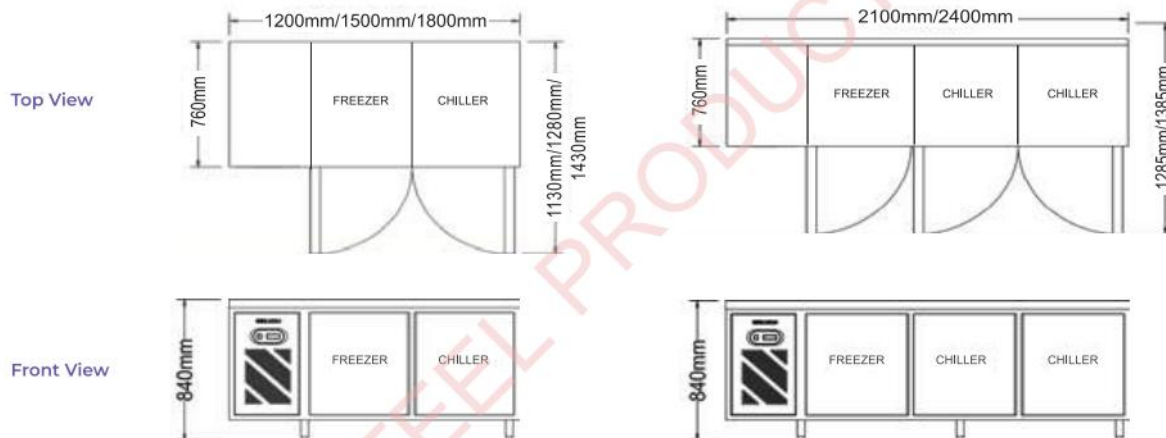

2 Door-4'

2 Door-5'

2 Door-6'

3 Door-7'

3 Door-8'

MODEL	BS 2DCF4/Z	BS 2DCF5/Z	BS 2DCF6/Z	BS 3D2C1F7/Z	BS 3D2C1F8/Z
Temperature°C (celsius)					
- Chiller	+1 to +6	+1 to +6	+1 to +6	+1 to +6	+1 to +6
- Freezer	-20 to -14	-20 to -14	-20 to -14	-20 to -14	-20 to -14
External Dimension (mm)	1200 x 760 x 840	1500 x 760 x 840	1800 x 760 x 840	2100 x 760 x 840	2400 x 760 x 840
Gross Volume (Litres)					
- (left) Freezer	127	178	230	183	224
- (right) Chiller	127	178	230	375	445
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	362	415	415	680	680
Wattage (W)	371 - 409	418 - 462	456 - 504	462 - 510	474 - 522
Ampere (A)	2.5 - 2.7	2.8 - 3.2	3.0 - 3.4	3.1 - 3.5	3.3 - 3.7
Refrigerant	R404a	R404a	R404a	R404a	R404a
Defrost System	Electric Heater	Electric Heater	Electric Heater	Electric Heater	Electric Heater
PVC Coated Shelving	4	4	4	6	6
Weight (kg)	88	107	119	141	151
Unit For 20ft Container	22	20	14	14	8
Unit For 40ft Container	46	42	28	28	16

Note:

Option : CW - Castor Wheel / BF - Bullet Feet