

COUNTER FREEZER


Magnetic Solid Door • Tested at ambient temperature of 38°C



BS 2DF4/Z • BS 2DF5/Z • BS 2DF6/Z



BS 3DF7/Z • BS 3DF8/Z

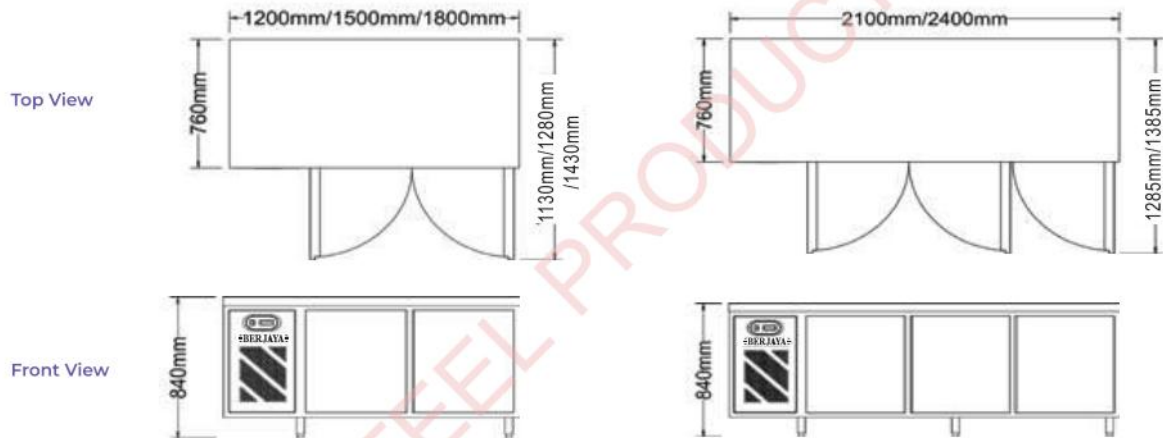

	2 Door-4'	2 Door-5'	2 Door-6'	3 Door-7'	3 Door-8'
MODEL	BS 2DF4/Z	BS 2DF5/Z	BS 2DF6/Z	BS 3DF7/Z	BS 3DF8/Z
Temperature°C (celsius)	-20 to -14	-20 to -14	-20 to -14	-20 to -14	-20 to -14
External Dimension (mm)	1200 x 760 x 840	1500 x 760 x 840	1800 x 760 x 840	2100 x 760 x 840	2400 x 760 x 840
Gross Volume (Litres)	262	366	472	576	681
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	362	415	415	680	680
Wattage (W)	402 - 444	388 - 429	580 - 641	619 - 684	713 - 787
Ampere (A)	2.7 - 3.0	2.8 - 3.1	3.7 - 4.1	3.9 - 4.3	4.7 - 5.3
Refrigerant	R404a	R404a	R404a	R404a	R404a
Defrost System	Electric Heater	Electric Heater	Electric Heater	Electric Heater	Electric Heater
PVC Coated Shelving	4	4	4	6	6
Weight (kg)	88	102	116	138	152
Unit For 20ft Container	22	20	14	14	8
Unit For 40ft Container	46	42	28	28	16

*Available on 600 Series and 700 Series

Note:

Option : CW - Castor Wheel / BF - Bullet Feet