

AC 206

Scotsman
Ice Systems

Self Contained Ice Machine up to 130 kg

Item #:

Project:

Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front panel mount ON-OFF Switch
- Routine maintenance visible alarm light on front pane
- Ergonomically designed ice-storage access, with disappearing door. Door-closing movement dampening system.
- Vapor-based microbial control system pouch in ice-storage area.



AC L 206
Large Gourmet 39 g
Ø 38 x H 41 mm



AC M 206
Medium Gourmet 20 g
Ø 30 x H 34 mm



AC S 206
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

INTERNAL BIN CAPACITY

50 kg

REFRIGERANT GAS

R404A

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

VOLTAGE V/Hz/ph

230/50/1
230/60/1

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine up to 130 kg

1 February 2018

Self Contained Ice Machine up to 130 kg

AC 206




Self Contained Ice Machine up to 130 kg

Item #:

Project:

Quantity:

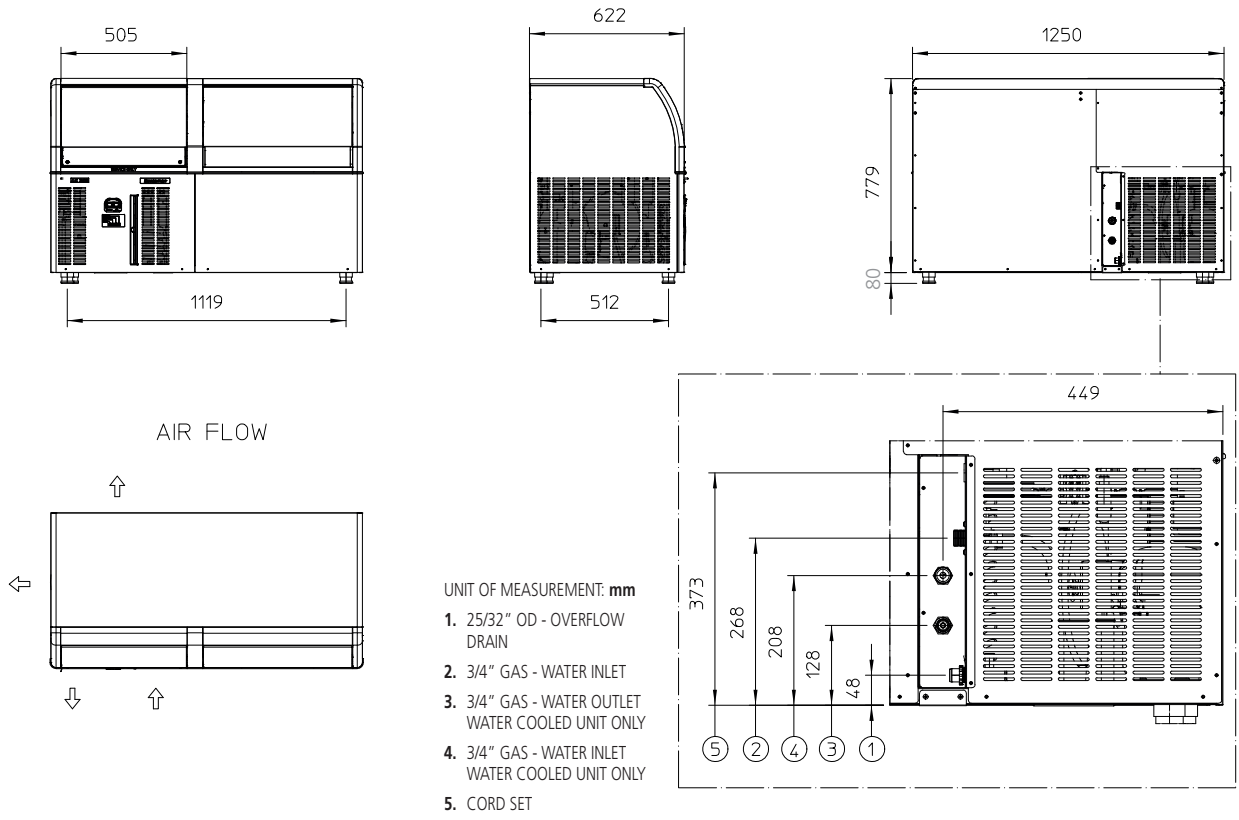

UNIT DATA Size (W x D x H) 1250 x 622 x 859 mm Net weight 82 kg SHIPPING DATA Carton (W x D x H) 1320 x 690 x 960 mm Weight 95 kg					Compressor		Circuit wires		Max. fuse size
			Version	Voltage	Btu/h	W	No.	Ømm²	A
			AC L 206 AS	230/50/1	7165	2100	3	1.5	16
			AC L 206 WS	230/50/1	7165	2100	3	1.5	16
			AC M 206 AS	230/50/1	6039	1770	3	1.5	16
			AC M 206 WS	230/50/1	6039	1770	3	1.5	16
			AC S 206 AS	230/50/1	7165	2100	3	1.5	16
			AC S 206 WS	230/50/1	7165	2100	3	1.5	16
			AC M 206 AS	230/60/1	6995	2050	3	1.5	16
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
AC L 206 AS	Air	230/50/1	126	117	92	21.6	20.5	9.6	950
AC L 206 WS	Water	230/50/1	126	124	112	15.4	17.2	115.8	700
AC M 206 AS	Air	230/50/1	130	123	91	19.9	18.1	10.8	850
AC M 206 WS	Water	230/50/1	128	126	108	14.9	16.1	81.3	760
AC S 206 AS	Air	230/50/1	100	93	72	29.8	21.3	7.5	950
AC S 206 WS	Water	230/50/1	100	93	72	29.8	21.3	81.3	950
AC M 206 AS	Air	230/60/1	130	123	91	24.0	21.8	12.5	1050

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions