

Knee operating handwash basins

- In AISI 304L stainless steel
- With 240 mm high splashback at a 30° angle, flexible connection hose, U-bend, swan's neck tap, 1/2" hot/cold water connector
- Premixed hot/cold water (except LMASD)
- Non-return valve
- Push tap adjusted at the factory to: 6l/min




Protects the planet with its low water consumption Ergonomics: Knee-operated panel suitable for any size of user

Hygiene: Splashback at a 30° angle, no retention of liquid



HANDWASH BASINS: ROUND BOWL Ø 305 mm x 150 mm



NO PRE-MIXER Only one water inlet	mm L x D x H	Kg	Ref.
With splashback	384 x 353 x 524	8	LMASD*
With splashback + plastic soap dispenser*	384 x 353 x 524	8	LMASDD

^{* =} LMDSAV page 13






WITH PRE-MIXER	m m L x D x H	Kg	Ref.
With splashback	384 x 353 x 524	8	LMASB*
With splashback + plastic soap dispenser*	384 x 353 x 524	8	LMASBD
No splashback	384 x 353 x 287	7	LMA*

^{* =} LMDSAV page 13



HANDWASH BASINS: RECTANGULAR PRESSED BOWL, 400 X 250 X 140 mm

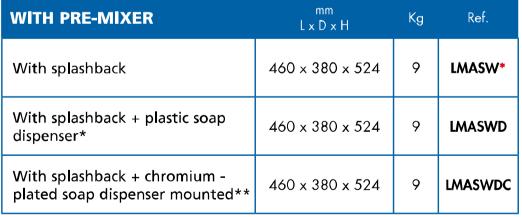

^{* =} LMDSAV page 13





ACCESSORIES
PAGES 12-13











^{** =} LMDSAVC2 page 13