
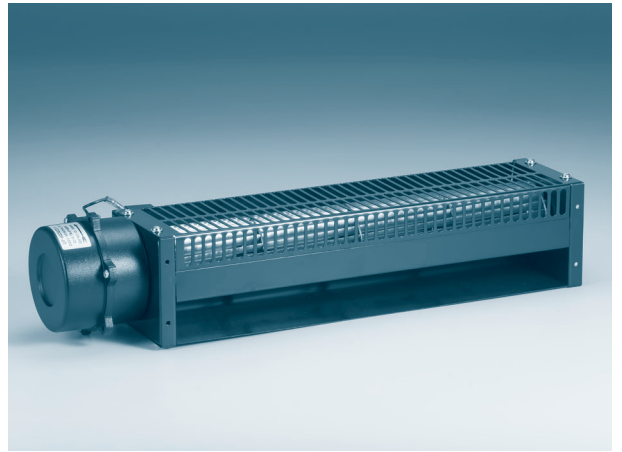


# UF6036 Series

Size : 462 x 100 x 90  
Unit : mm


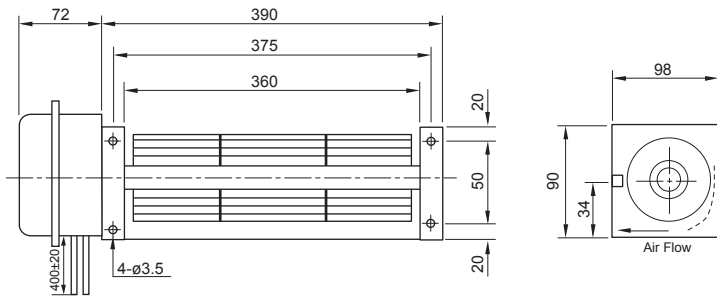


**Thermally-Protected**

Spec. Model	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m <sup>3</sup> /min.	Maximum Air Flow CFM	Maximum Pressure mmH <sub>2</sub> O	Maximum Pressure InchH <sub>2</sub> O	Noise dB	Weight kg
UF6036CBA12HL	120	50	35	0.33	0.46	2500	5.5	195	5.0	0.20	50	2.1
		60	37	0.33	0.46	2800	6.0	212	7.5	0.30	53	
UF6036CBA23HL	230	50	35	0.17	0.22	2500	5.5	195	5.0	0.20	50	2.1
		60	37	0.17	0.22	2800	6.0	212	7.5	0.30	53	

# UF6030 Series

Size : 402 x 100 x 90  
Unit : mm

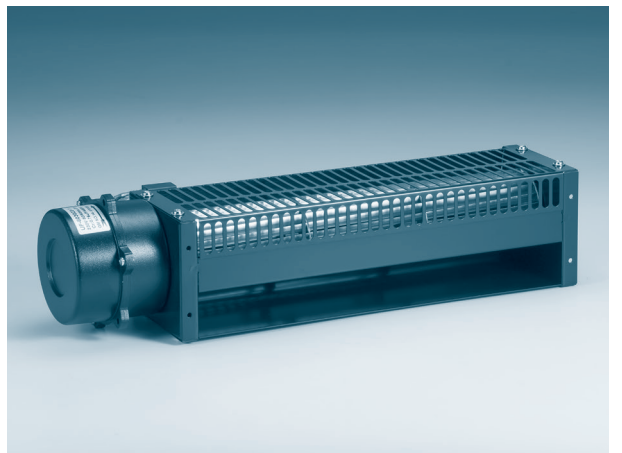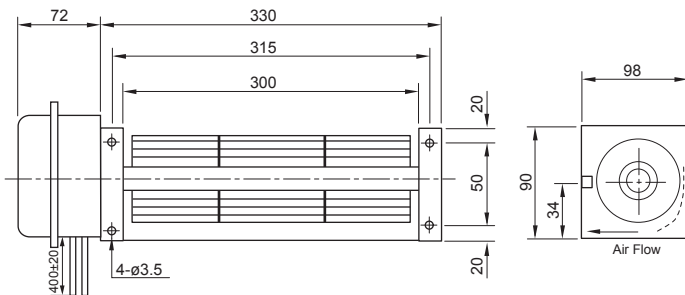

**Thermally-Protected**

Spec. Model	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m <sup>3</sup> /min.	Maximum Air Flow CFM	Maximum Pressure mmH <sub>2</sub> O	Maximum Pressure InchH <sub>2</sub> O	Noise dB	Weight kg
UF6030CBA12HL	120	50	35	0.33	0.46	2600	5.0	177	5.0	0.20	50	2.0
		60	37	0.33	0.46	3000	5.5	195	7.5	0.30	53	
UF6030CBA23HL	230	50	35	0.17	0.22	2600	5.0	177	5.0	0.20	50	2.0
		60	37	0.17	0.22	3000	5.5	195	7.5	0.30	53	