

法兰视镜

Flanged sight glass

不锈钢外壳, DC24V供电
Stainless steel shell, DC24V power supply



充电/有线供电, 灯法兰视镜
Charging/cable power supply, flange sight glass with lamp




技术优势 Technical advantage

- ◆强光、白色冷光源/防水、防爆设计
- ◆有线供电AC110V-220V、DC24V
- ◆无线供电, 一次充电可以使用2-3个月(根据频率而定)

- ◆High light, white cold light source/waterproof, explosion-proof design.
- ◆Cable power supply AC110V-220V, DC24V
- ◆Wireless power supply, one charging can use 2-3 months (Depending on the frequency)

应用 Applications

- ◆法兰视镜由不锈钢结构和钢化玻璃组成。在食品加工, 化妆品, 制药和精细化工工业中, 可以通过它清晰并且精确的观察物料流动。
- ◆Flanged sight glass is comprised of stainless steel frame and glass. Through it, operator can observe the flowing of the liquid substance clearly and precisely in the fields of food, cosmetics, pharmaceutical and fine chemicals industries.

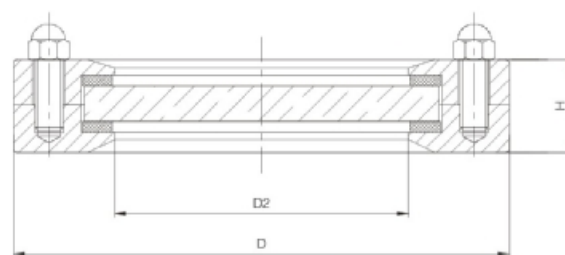

NO.VSJ200N1

设计和特点 Design and features

- ◆规格从1.5"-8"到DN40-DN200
- ◆通过内六角螺栓将两片法兰及玻璃装配在一起
- ◆垫圈材质: PTFE 符合FDA177.1600
- ◆材质: AISI 304(1.4301) AISI 316L(1.4404)
- ◆最大温度: -10°C到+120°C
- ◆最大压力: 10bar
- ◆Size: 1.5"-8" to DN40-DN200
- ◆Assemble flange with glass by using hexagon socket bolts
- ◆Gasket material: PTFE in accordance with FAD 177.1600
- ◆Material: AISI304(1.4301) AISI316L(1.4404)
- ◆Max. Temperature: -10°C to +120°C
- ◆Max. Pressure: 10bar

法兰视镜 Flange dsight glass

SIZE	H	D	D2
DN40	25	115	68
DN50	29	140	78
DN65	29	155	98
DN80	29	155	98
DN100	30	190	128
DN125	33	224	154
DN150	41	250	183
DN200	45	310	233